


Step 1 - Dry Run

Once all posts are fixed, place handrail supports into the top of each upright.. **1)** Place elbows into the ends of handrails and onto the fixed uprights. **2)**

PLEASE NOTE: DO NOT use any MMA Adhesive at this time.

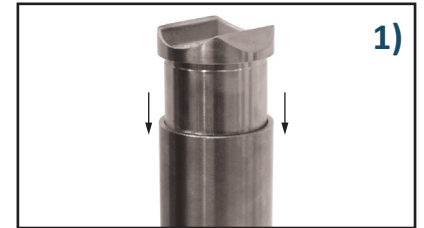


Step 2

Tap supports to handrail using gauze tape. Remove handrail from the uprights ensuring the supports are securely taped in the same position as the handrail was. **3)**




Step 3

Using a felt pen, mark the holes on the handrail where the handrail support is positioned. Untape the handrail supports once all holes are marked.

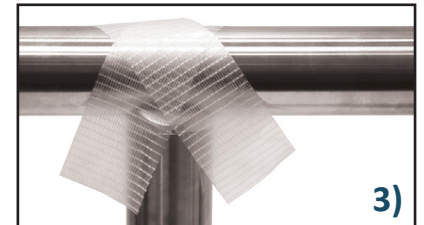

Step 4


Ensuring the handrail is securely positioned within a vice, place a small piece of gauze tape over the marked area and using a sharp point, gently mark a pilot hole into your handrail - this will help to drill your hole. Place lubricant onto your drill bit and drill holes.. **4)**

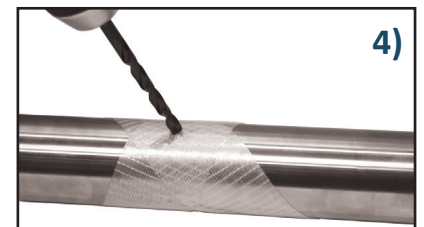

Next, tap the drilled holes with the included taper. Remove all tape once the holes are drilled and tapped..

Step 5

Replace your handrail supports by lining up holes in the supports with holes in the handrail. Place fixings through the underside of your handrail support and tighten until the handrail is securely fixed. Repeat for all handrail supports. **5)**

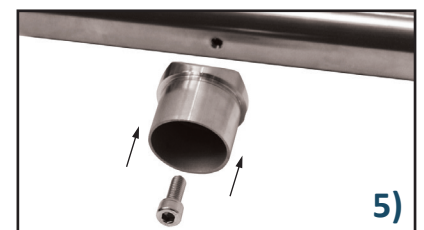

Step 6

Apply adhesive onto the male fittings of your handrail supports and the male fitting of any elbows on the end of your handrail. Place the supports and elbows into your uprights **6)**



Step 7

For extra support, apply gauze tape to areas with adhesive. Leave to set for 24 hours.

For further help with your balustrade system, please contact our sales team.